



Desk

Contemporary Warmth

# Gravy desk lamp


Designers  
Kenneth Ng, Edmund Ng

Good Design Award 2019  
Spark Award 2013

Invite the warmth of wood and light to your home or office. Gravy's head emits warm white light and swivels 360.° The wood bar slides back and forth to provide adjustable light placement. This striking combination of real wood, aluminum and a braided fabric cord is perfect in any setting.

Lumens: 275  
 Footcandles: 100  
 Lux: 1076  
 Energy Consumption: 6 W  
 Rated Lifespan: 50,000 hours  
 Color Temperature: Warm: 3,500 K  
 Color Rendering Index (CRI) : 85  
 Brightness Adjustability: Continuous dimming  
 Material: Aluminum, plastic  
 Safety Rating: C-UL-US Certified  
 Warranty: 5 years  
 Voltage: 100-240 V  
 Standard Finishes: Maple/Silver, White Oak/Matte White, Walnut/Matte White  
 Cord: Braided

Maple/Silver; White cord — GR1-W-MPW-SIL-DSK  
 White Oak/Matte White; Blue cord — GR1-W-WOB-MWT-DSK  
 Oiled Walnut/Matte White; Red cord — GR1-W-WNR-MWT-DSK

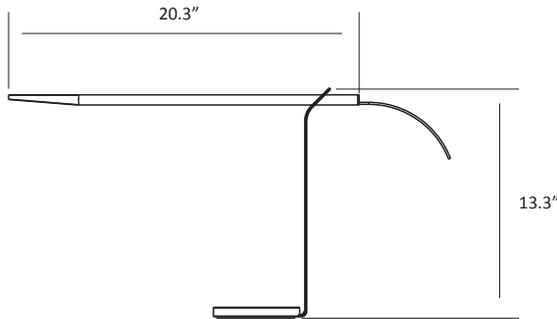

**Finishes/Cord Color**



Maple / Silver; White cord



White Oak / Matte White; Blue cord



Walnut / Matte White; Red cord

**LEED Information**

**Integrative Process**

To support high-performance, cost-effective project outcomes through an early analysis of the interrelationships among systems. Konzept's LED desktop and task lighting provides finer control over lighting levels in occupied spaces. With personal lighting in place, elimination or downsizing of building lighting systems is possible.

**Interior Lighting**

To promote occupants' productivity, comfort and well-being by providing high-quality lighting. Konzept's portable task lighting products provide more than three lighting levels that occupants can easily adjust to suit their needs. Furthermore, all Konzept lighting products use high quality LED light sources with CRI over 80 and L70 rated lifespan over 50,000 hours. Desktop and task personal lighting also provide the opportunity to reduce overhead lighting.

Photometrics: Light source placed 12.75" away from work surface

